

ENERGY FOR YOU...



SK-038 42 Příbovce 343
Tel.: +421/43/42 94 466
Tel.: +421/43/42 94 916
Fax.: +421/43/42 94 026
E-mail: tts@tts-martin.sk
www.tts-martin.sk




LOMBARDINI

Diesel engine LOMBARDINI

Base power range from 4,2kVA within 10kVA

Nominal speed / frequency: 3000min⁻¹ / 50Hz

Air cooled engine

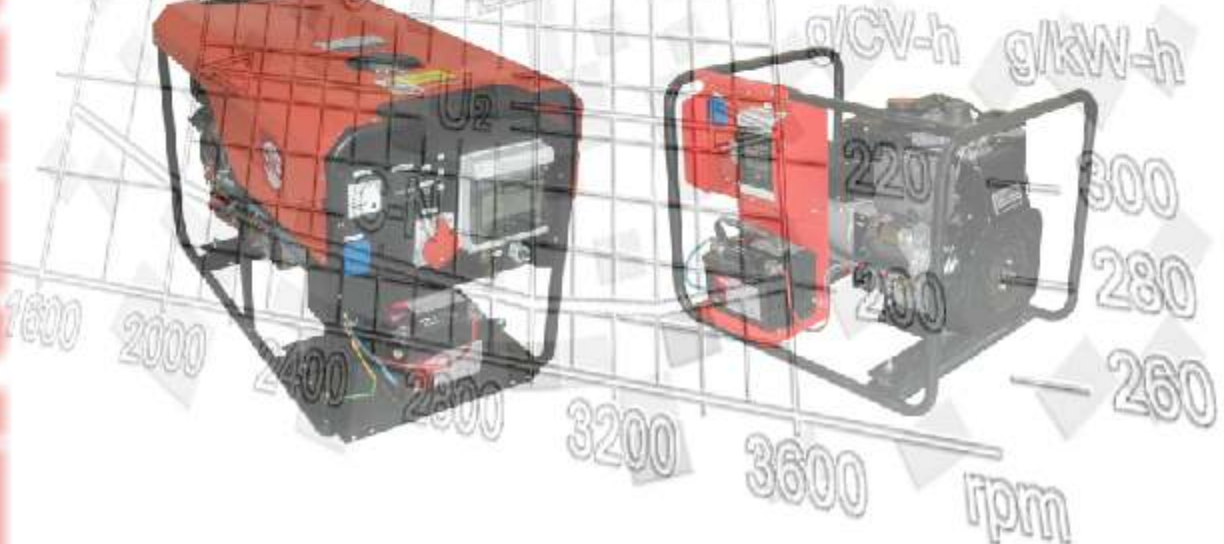

GENSET TYPE	MAX. POWER (LTP)	PRIME POWER (PRP)	ENGINE TYPE	NOMINAL VOLTAGE	STARTING	FUEL CONSUMPTION (PRP)	FUEL TANK VOLUME	BASE UNIT DIMENSIONS (L / W / H)	BASE UNIT WEIGHT	CANOPIED UNIT DIMENSIONS (L / W / H)	WEIGHT 100LWA
	(kVA / kW)	(kVA / kW)		(V)		(L/h)	(L)	(mm)	(kg)	(mm)	(kg)
HANDY MP48 DE	4,5 / 3,6	4,2 / 3,4	15 LD 350	230	electric	1,45	4,3	780/530/630	85	1200/700/890	146
HANDY MP56 DE	6,9 / 5,5	6,4 / 5,1	15 LD 440	230	electric	2,0	5,0	780/530/630	121	1200/700/890	195
HANDY MP56 TDE	7,2 / 5,8	6,6 / 5,3	15 LD 440	3 x 230/400	electric	2,0	5,0	780/530/530	121	1200/700/890	195
BOXER MP88 DE	11,0 / 8,8	10,0 / 8,0	25 LD 425	230	electric	3,11	4,5	880/550/630	145	1200/700/890	219
BOXER MP88 TDE	11,0 / 8,8	10,0 / 8,0	25 LD 330	3 x 230/400	electric	3,11	4,5	880/550/630	145	1200/700/890	219

Options:

- retention bath for genset without canopy
- additional exhaust silencer
- fast trailer
- trailer for slow towing
- trailer for moving manually
- remote genset monitoring and control
- wall fuel tank 20L
- external fuel tank 20L

For genset installed in canopy standard 40L fuel tank